

DM935

2×10W Stereo Music Amplifier



Description


This product is a 2×10W stereo music amplifier with a 1.5" LCD dot matrix display screen. With various audio sources, such as Bluetooth, FM and external audio sources, it is widely used in upscale residential communities, villas, senior clubs, high-class hotels, etc. Also, it can support 485 control protocol.

Features

- High transparency and high hardness crystal panel, 1.5" LCD dot matrix display screen.
- Audio format: Support MP3 and other audio formats.
- Bluetooth function: Support pairing with mobile phone and other external Bluetooth devices for audio playback.
- External audio input: Support external audio source input and output after amplification.
- Software upgrade: Support software upgrade with a TF card.
- Memory card function: Can connect a TF card, and support up to 32GB.
- Support auto music playback after power-on.
- Volume adjustment: 30-level electronic volume adjustment function.
- Support FM function.
- Support 485 control protocol.


Specifications

Model	DM935
Power Supply	AC220V(50HZ), 90V-250V allowed
Output Power	2×10W
Bluetooth Distance	≧ 10m
Audio Format	MP3, WAV, WMA, FLAC, APE
Load	8Ω
SNR	≥98dB
Product Dimensions	86*86*13mm
Bluetooth Audio Format	MP3, WMA, APE, FLAC, WAV

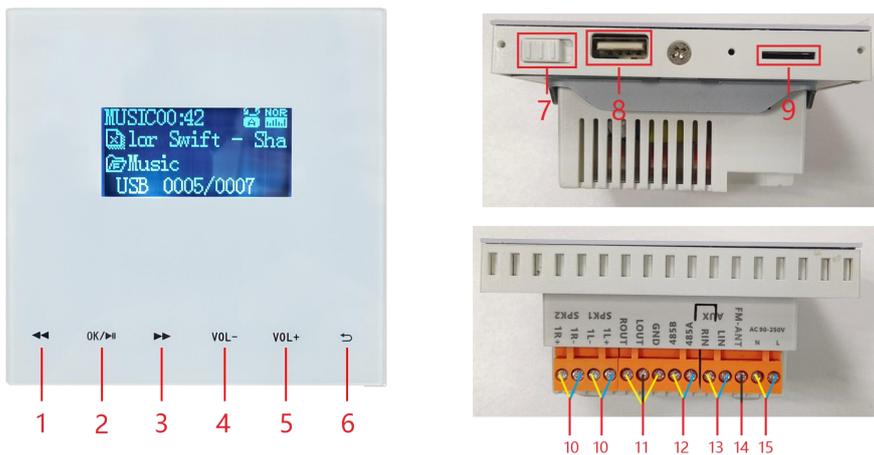

1. Backward/Rewind button: Touch this button in the menu state to select backward or upward; touch this button in the music playing state to skip to the previous song, and hold it for a while to go backward quickly.
2. OK/Play/Pause/Menu button: Touch this button in the main interface to enter the current sub menu; touch this button in the music playing state to pause playing and touch again to continue playing; and hold it for a while in the sub menu to enter the sub menu.
3. Forward/Fast Forward button: Touch this button in the menu state to select forward or downward; touch this button in the music playing state to skip to the next song, and hold it for a while to move forward quickly.
4. VOL- button: Touch this button to turn down the volume.
5. VOL+ button: Touch this button to turn up the volume.
6. Back button: Touch this button in the power-on state to return.
7. Power switch.
8. Host USB interface: Upgrade the host system with a USB.
9. TF card slot: Insert the TF card into the slot. Up to 32G capacity can be supported.
10. Speaker L/R channel output: Speaker cable (commonly known as RVH), RVH2X100, RVH2X200.
11. Audio output: Audio cable (two-pin shielded cable: commonly known as microphone cable), RVVP2X0.5, RVVP2X0.75.
12. 485 control line.
13. AUX audio input: Audio cable (two-pin shielded cable: commonly known as microphone cable), RVVP2X0.5, RVVP2X0.75.
14. FM signal line: Use a single-stranded line, with a core diameter of not less than 1mm and a length of more than 2m.
15. Power cord: AC90V-250V.

Remote Controller

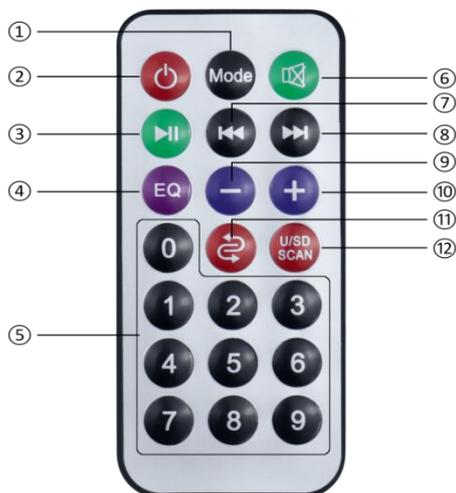

Function buttons:

- ① Mode main function button, working mode switch.
- ② Power switch (only control Bluetooth/USB/FM).
- ③ Play/Pause / Auto Search in FM.
- ④ EQ sound effect.
- ⑤ 0-9 song selection buttons, which can be composed of a digital channel for channel selection in FM.
- ⑥ Mute key.
- ⑦ Previous song/Previous station in FM.
- ⑧ Next song/Next station in FM.
- ⑨ VOL- button.
- ⑩ VOL+ button.
- ⑪ Cycle button.
- ⑫ U/SD / Scan: In MP3 mode, switch to USB flash drive or SD card for playing.