

LA1408S **Passive Subwoofer**



Features

- The case is made of special plywood for ship, and the reliability of all metal accessories made of aluminum alloy is high quality ;
- Using a high peak power switching power supply, Class-D independent power amplifier ;
- Long stroke woofer, strong bass ;
- Excellent mobile applications


Description

LA1408S is a passive subwoofer in a mini line array system. The case is made of special plywood for ship, and the reliability of all metal accessories made of aluminum alloy is high quality. Using a high peak power switching power supply, Class-D independent power amplifier. Long stroke woofer, strong bass. With excellent mobile applications

Specification

Item	LA1408S
Unit Structure	15"subwoofer×1
Frequency	38 Hz – 160 Hz(±3dB)
Speaker sensitivity(1m, 1W)	98dB
Max SPL	125dB
Passive signal input impedance	8 Ω
Amplifier Wattage	800W
Speaker rated power	400W
Amplifier input sensitivity	0.775V
Power amplifier distortion	<0.05%
Working Voltage	AC220V~50/60Hz
Color	Black
Size	480mm×515mm×532mm
Weight	43.4kg

Description of panel

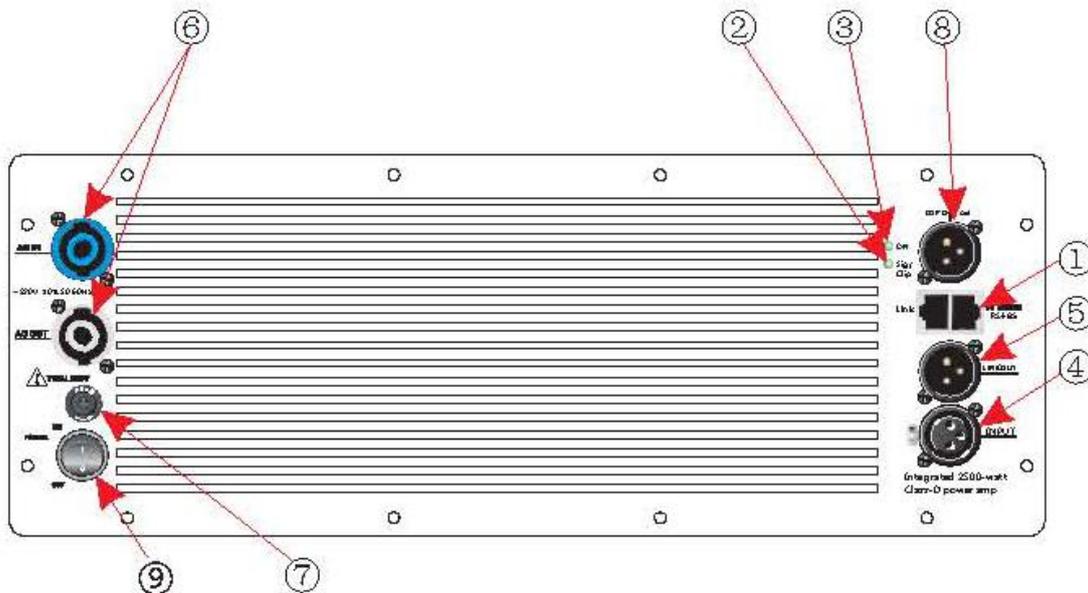

- ①、Control interface: RS485 connection with the computer, you need RS232 to USB interface conversion
- ②、Signal indicator: green flashing for the signal indication, red flash for the signal overload indication

- ③、 Power indicator: green for the work of normal, red for the protection of the state
- ④、 Signal input: XLR signal input(1: Ground, 2: +, 3: -)
- ⑤、 Signal output: XLR input signal port(1: Ground, 2: +, 3: -)
- ⑥、 Power input: AC 220V 50Hz/60Hz
- ⑦、 Insurance device: 15A