

# DSP5020T

## Tabletop Speaker



### Description

This product is an 8Ω tabletop speaker with 5" compound material cone and 1" aluminum dome. It is made of ABS material and features IP66 waterproof level. Besides, it utilizes the exclusive OBE technology for optimal bass enhancement.

### Features

- An 8Ω constant-resistance speaker, with a 5" woofer and a 1" tweeter.
- Made of ABS material.
- With IP66 waterproof level.
- Exclusive OBE Technology: Optimal Bass Enhancement Radiator, a state-of-the-art bass radiator design, using Anacord's Exclusive Optimal BASS Enhancement (OBE) Technology that will deliver an outstanding deep and clear bass audio experience even without any extra subwoofer support.


### Specifications

Model	DSP5020T
LF Unit	5" (125mm) compound material cone, rubber surround
HF Driver	1" (25mm) Aluminum dome

Impedance (AC)	8Ω
Frequency Range +/-3	105Hz-20kHz
Power Handling RMS	40W program, 20W (IEEE 219)
Sensitivity	85dB
Termination	Standard pressed connector
Dimensions L*W*H	6.29" x6.69" x10.94" (160mmx170mmx278mm)
Certifications	IP66 waterproof speaker
Material	ABS



## Connections

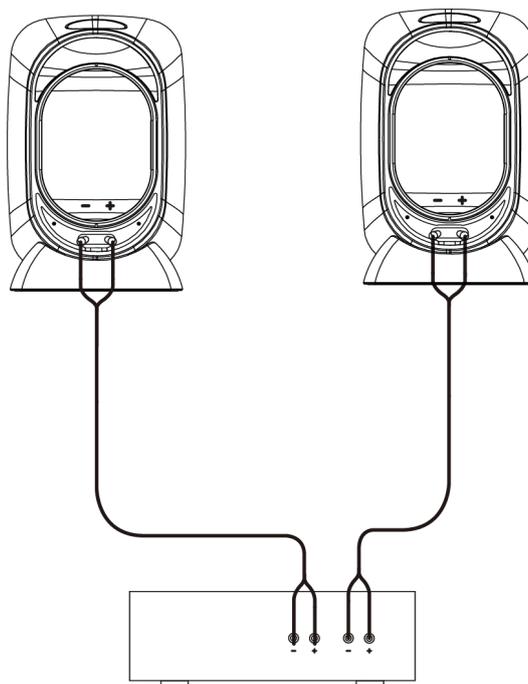

Connect the speaker terminals to the matching terminals of your amplifier: the "+" of the speaker (red) with the "+" of the amplifier, and the "-" of the speaker (black) with the "-" of the amplifier.